

SLT

72" METERED POWER DISTRIBUTION PEDESTAL

FEATURES

Typically included with a 12 cct. 120/240V Distribution panel with a 60A or 100A, 2 Pole main breaker and any combination of 1 and 2 pole load breakers required.

Complete with 2" PVC conduits for Line and Load Side conductors and a ground wire to bond the Neutral. Choice of meter bases to meet local Hydro Authority requirements.

Delivered "Ready to Install" with a Service Entrance rating, 22kA I.C. series rating, and ESA approval.

Hardware to fasten pedestal to pre-cast concrete base is included with every pedestal, matching base available from several pre-cast concrete manufacturers.

Pedestal Enclosure is NEMA 3R Tested and backed with a 10 year warranty.

CONSTRUCTION


Constructed from heavy-gauge aluminum. Electrostatic UV and Corrosive resistant powdercoat in "Equipment Green" as standard. All doors constructed to prevent weather intrusion without the means of rubber gasket.

Concealed Ventilation under lid to prevent condensation build-up. Stainless-steel fasteners used to mount all internal and external components. Also available in 316 Stainless Steel.

Pedestal Enclosure Sits 72" tall x 18" wide x 8" deep.


CUSTOMIZATION

Can be designed to include timers, contractors, photocells etc, for any type of motor and lighting control.



HUNDREDS OF CUSTOM COLOURS AND TEXTURES AVAILABLE.

APPLICATIONS/MARKETS

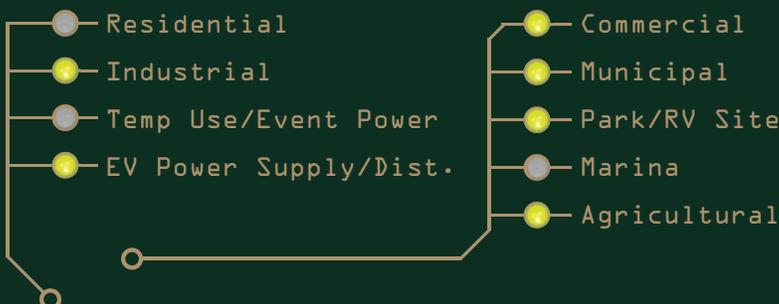

TYPICAL PART NUMBER

SLT1-4-40



